




# Installing Synthetic Underlayment over Taped Seams




Qualifying options are in the standards



Plastic caps with nails at 12" o.c. in the field

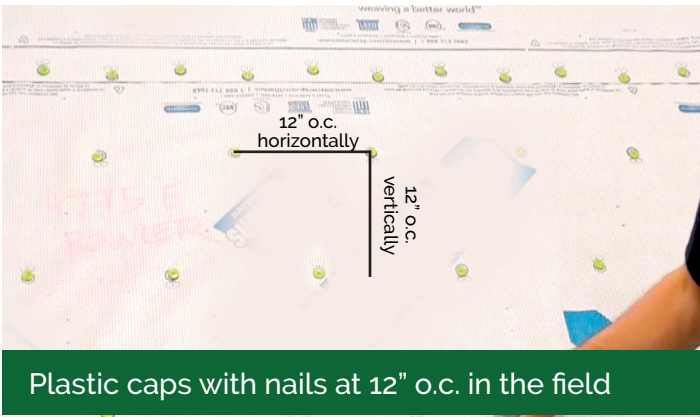

Plastic caps with nails at 12" o.c. in the field

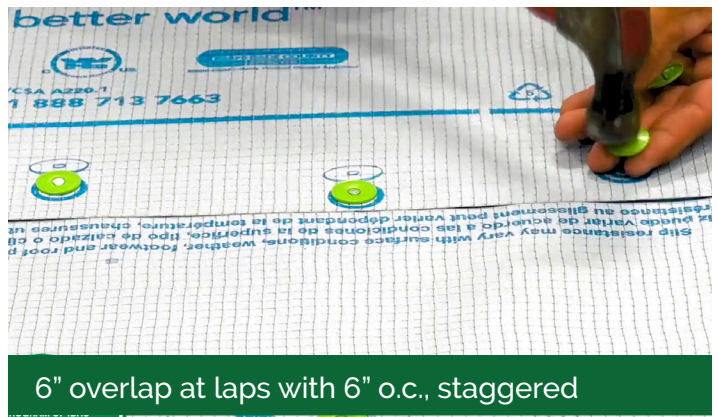

6" overlap at laps with 6" o.c., staggered

Write the address on the roof deck.

Take photos of:

- the entire roof deck
- fastener spacing

