



HOW WESTERN COLLOID HELPS BUILD YOUR BUSINESS

With Fluid Applied Reinforced Roofing = FARR



CLEAN & PREP | ADDRESS DETAILS | APPLY EMULSION | EMBED POLYESTER | APPLY COATING

- **Unsurpassed Customer Support**

Consultations – Specifications – Technical & Field Training

- **Environmentally Sound**

Providing Products that are Energy Saving & Eco-Friendly.

- **40 Years Of Proven Performance**

Seamless, Tough & Flexible

- **Competitive Pricing**

Offering systems designed to fit any budget.



Any Size Job Big Or Small

From Gallons To Tankers We Can Supply Your Project.



www.WesternColloid.com

Call Us Today For Products You Can Count On • 800-464-8292



With WESTERN COLLOID You Can Install A Seamless, Tough & Flexible Roof System with this Equipment

SPRAY HOSE RECOMMENDATIONS

Emulsion Hose:

1,200 -1,500 PSI Working Pressure*
(Depending on pump used – for example a GRACO 1015 lower end)

$\frac{3}{4}$ " Hose - 50' to 200' or more
Please Note: The longer the $\frac{3}{4}$ " hose the better volume that is delivered to the spray bar but it is heavier and harder to handle.


$\frac{1}{2}$ " Hose – 100' to 200' or more
Please Note: $\frac{1}{2}$ " hose can be used for entire length of up to 500 to 600 feet.

Acrylic Hose:

4,000 PSI Working Pressure*
(Depending on pump used - for example a 250cc pump lower end)

$\frac{1}{2}$ " Hose – 100' to 200' or more
Please Note: $\frac{1}{2}$ " hose can be used for entire length of up to 500 to 600 feet.

*Always Use Proper Hose Rated For Spray Pump

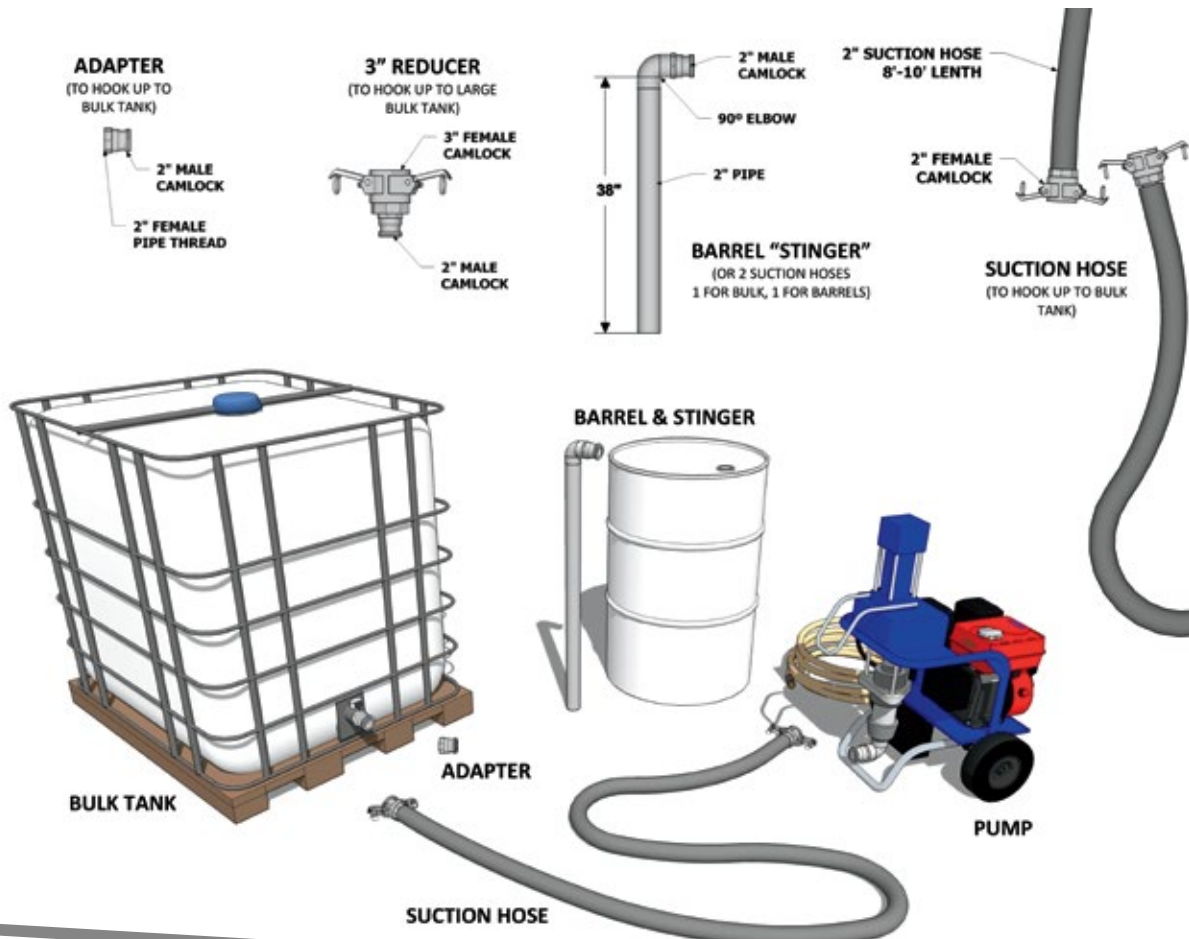

EQUIPMENT RECOMMENDATIONS

Contact Us Today About Your Next Project! 800-464-8292