




INDUSTRY-LEADING WALKABILITY

The unique embossed pattern allows for better traction and grip while walking on the roof.



TRUSTED QUALITY AND DURABILITY

Another innovative material breakthrough from DuPont™ Tyvek®, the leader in building envelope systems.



A FAMILY OF UNDERLAYMENTS

Our portfolio of roofing underlayments provides choices to better meet your needs.




Tyvek® Protec™ 120 is an engineered synthetic roofing underlayment with industry-leading walkability from DuPont, the trusted name in total building envelope solutions. Ideal for slopes 2:12 or higher under a variety of roofing materials in repair, re-roofing and new construction.

Tyvek[®] Protec[™]



Walkability	Best in Class
Roll Size (10 square)	48" x 250'
Rolls Per Pallet	49
Roll Weight	25 lbs
Warranty	30 years
UV Exposure	3 months
Roof Types	
Asphalt Shingle	✓
Cedar Shingle	✓
Metal	✓
Tile	Use Tyvek® Protec™ 160 or 200
Slate	Use Tyvek® Protec™ 160 or 200
Recyclable	✓
ASTM D226 Type	es I & II
ICC-ES AC188	✓
Class A Per ASTI	M E108 ✓

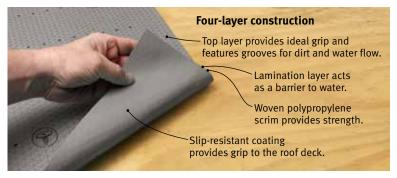



Easy to chalkAccepts and holds chalk marks for more visible lines and a better finished product.



Protects the roof

Preserves the roof deck during installation and provides an effective secondary moisture barrier.



Wrinkle-freeLays flat and stays flat for a more uniform shingled surface.



Supported by the DuPont™ Tyvek® Specialist Network
Specialists are available across the U.S. and Canada for additional knowledge and support.





tyvek.com/protec 1-800-44-TYVEK



