




# Fastening Sheathing on Existing Roofs in Hurricane Areas




Minimum deck thickness - 7/16" OSB or plywood

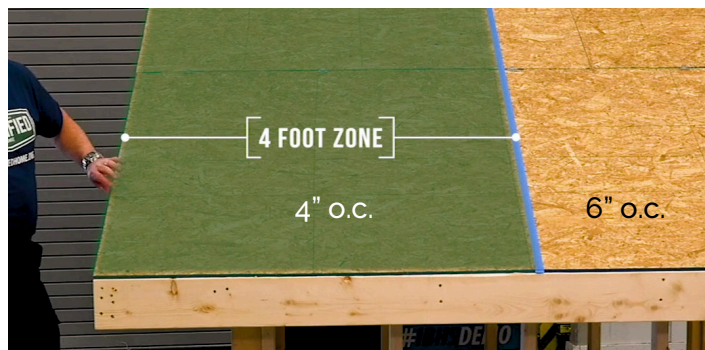

Four Foot Zone: Area 4' from edge of roof deck




Full Round Head 8d Ring Shank Nails

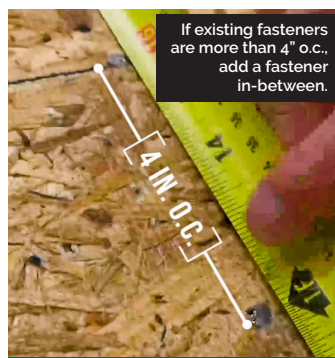

Four Foot Zone: 4" o.c.



Field: 6" o.c.

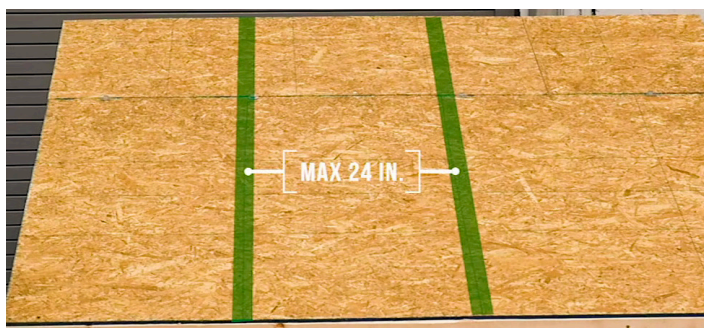

Maximum 24" between roof members

Write the address on the roof deck.

Take photos of:

- the entire roof deck
- roof member/
- truss spacing
- the nail spacing (show a tape measure)



Documentation Considerations

**FORTIFIEDHOME.ORG**