

VENTILATION

FLEX-O-VENT™ | FLEXPRO™ | LP2™ RIDGE VENT



Superior Roof Ventilation Your Way. (Because One Size Does Not Fit All.)

For products tailored to fit your specific performance requirements and budget, choose Marco. Our full line of ventilation products offers you a choice, all made from superior material that outlasts and outperforms the competitors' polyurethane-material products.

The Marco Weather-Tite™ System

Closure

Ventilation

Fasteners

Flashing

Sealants

Underlayment

Accessories



Our ventilation products feature an exclusive nonwoven polyester material that **delivers long-lasting resiliency and breathes**, to help prevent moisture **absorption** that can lead to costly rework, repairs, and high energy costs.



You may also need



Roof Boots™



Weather-Tite
Metal Roof Sealant



FLEX-O-VENT

GOOD



Our original, most economical polyester-based ventilation product.

- Won't absorb moisture, which can freeze and block all ventilation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- 40 year limited warranty
- ASTM testing: D1929, D737
- Available in 10' and 20' rolls and multiple packaging options



FLEX-O-VENT

Specs

Net Free Area: FOV - 1" free-standing product, NFA 23 sq. in.*

1-1/2" x 3" x 10': Rib heights up to 1-1/4"

1-1/2" x 2" x 10': Rib heights up to 1-1/4"

1" x 3" x 10': Rib heights up to 3/4"

1" x 2" x 10': Rib heights up to 3/4"

Air Permeability: >760 cubic feet per minute

Cold Cracking: -55° C (-130° F)

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

*Effective Net Free Area varies based on product height, panel profile, and installation methods.





New!

FLEXPRO

BETTER



LP2 RIDGE VENT

BEST



Marco's newest innovation: a profile-cut stick or roll product designed to fit most roof panels.

- Won't absorb moisture, which can freeze and block all ventilation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- 40 year limited warranty
- ASTM testing: D1929, D737
- Available in box or roll quantities

FLEXPRO™

Marco's new FlexPro offers a balanced combination of outstanding features from our superior LP2 and economical Flex-O-Vent products. Made with Marco's unique polyester fiber, FlexPro delivers durable, long-lasting performance.

Specs

Net Free Area: FlexPro Panel Fit - 1-1/8" free-standing product, NFA 26 sq. in.*

Available In: 3' stick, 20' and 50' rolls


Air Permeability: >800 cubic feet per minute

Tear Strength: 3.5 ppi

Tensile Strength: 16 psi – Elongation 175%

Compressive Strength: 1.8 psi at 75%

*Effective Net Free Area varies based on product height, panel profile, and installation methods.

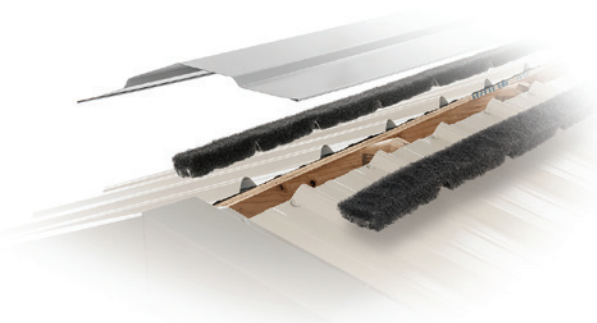

Our premier custom-cut vent strip includes Python™ polyester vent material inserts for a snug fit and optimum ventilation at a cost lower than traditional fans and louvers.

- Custom-cut profiles for snug fit
- Superior net-free ventilation reduces condensation
- 2 beads of M63 Marco proprietary adhesive for superior hold
- Easy, one-person installation
- Moisture and pest barrier
- 40 year limited warranty
- Non-obtrusive appearance
- Helps reduce utility costs
- ASTM testing: D1929, D737, D1294-86, D2261-83**
- Box quantity packaging



Our patented LP2 Ridge Vent is made from non-fabric-covered Python vent material. This durable, modified polyester is a non-woven, non-wicking, fiber-based matting. Its specially cut contours provide a custom, low-profile fit for any pitch and most major metal roof profiles. LP2 provides a superior net-free ventilation area that helps keep out moisture, pests and dust. Plus, LP2 can be installed by just one person in two easy steps. In fact, the screw bed and industrial strength peel-and-stick adhesive pre-applied to LP2 makes this one of the easiest installations imaginable.

Specs**

Net-Free Area: Varies with profile based on 17 square inches per linear foot of ventilation material

Dimensions: Varies with profile


Air Permeability: >760 cubic feet per minute

Cold Cracking: -25° F

Tear Strength: Machine 25 ppi / Counter 25 ppi


Compressive Strength: 1.8 psi at 75%

Rain: No leakage

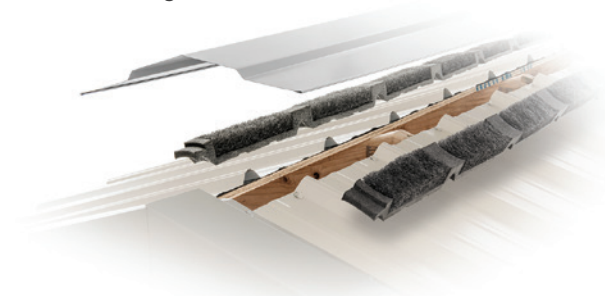

Value Through The Roof. Value drives everything we do. That's why we've delivered industry-leading products for more than twenty years. And that's why we developed the Marco Weather-Tite System — a comprehensive *line* of products that offers easy installation, remarkable building ventilation, lower utility costs, extreme durability, and outstanding warranties for your metal roof and wall systems. If you want to build it right, buy it smart. Get more quality, more performance and more value ... from Marco.

The Marco Weather-Tite™ System

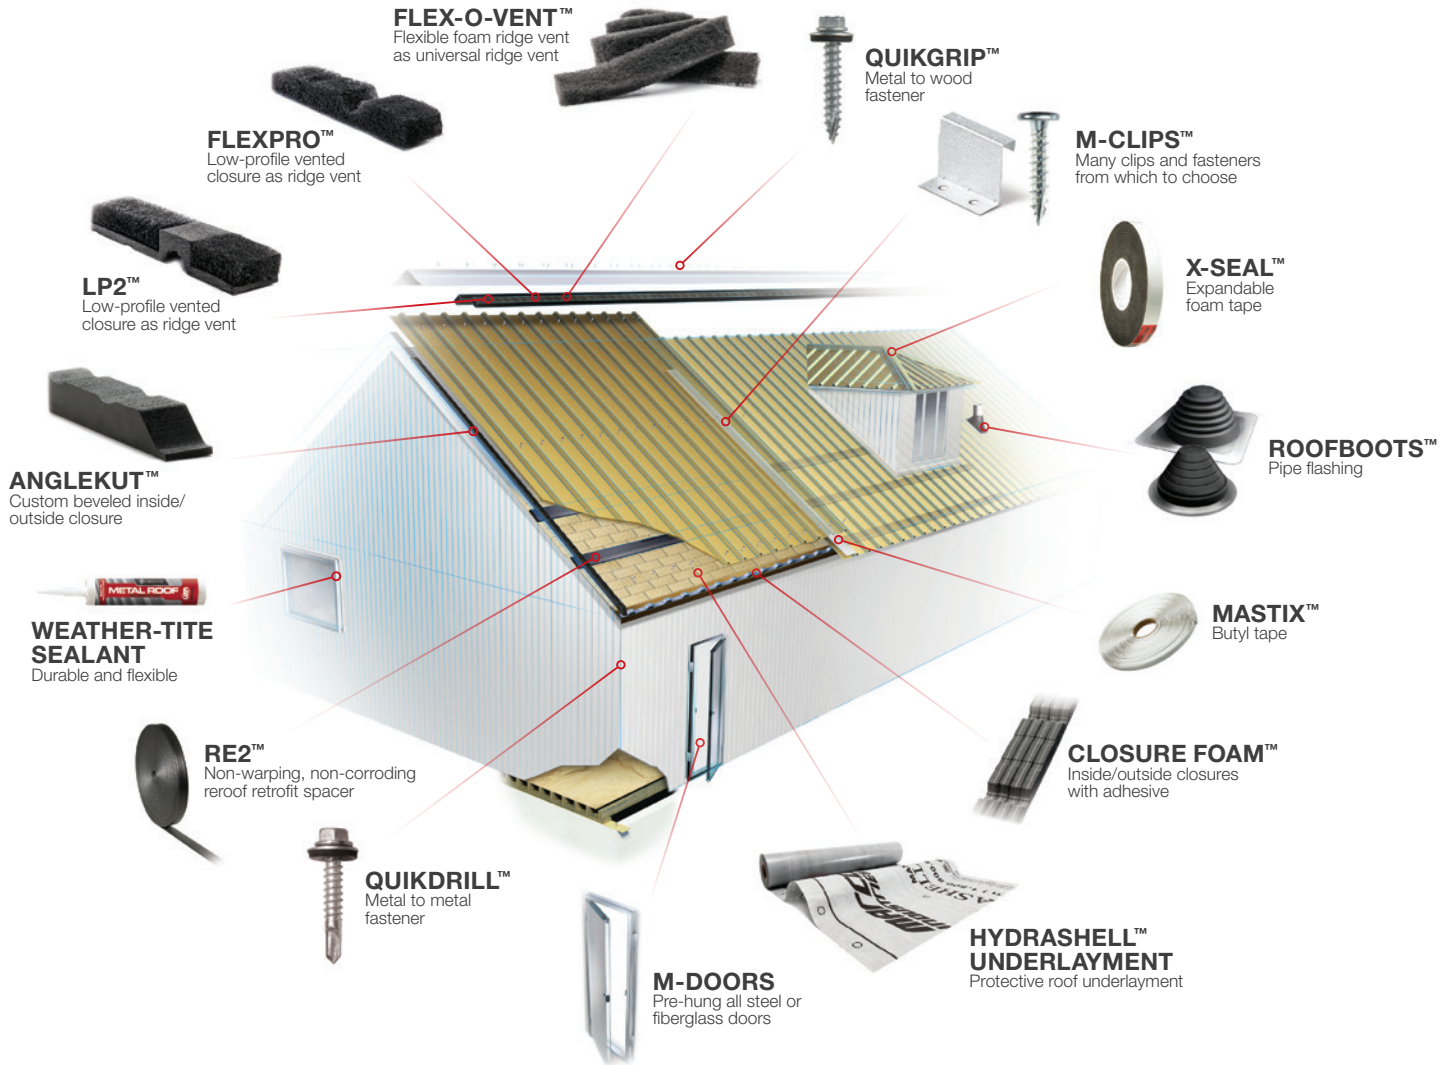

Value through the Roof.

800.800.8590 / MarcoIndustries.com



Marco's Rapid Response™ delivers, faster and easier. Take advantage of free shipping with low minimum orders.